

Product sheet

Basic Information

Order Number
Type
Common Number


1531296000
ZS2554
ZS2554



8592920156735

Measuring Unit
Packaging
Net Weight [kg]
Dimensions [mm]
Technical Support

Pcs
1 / - / - / 7
0,945
50 × 280 × 230
Martin Kulíšek, 581261116,
martin.kulisek@emos.cz

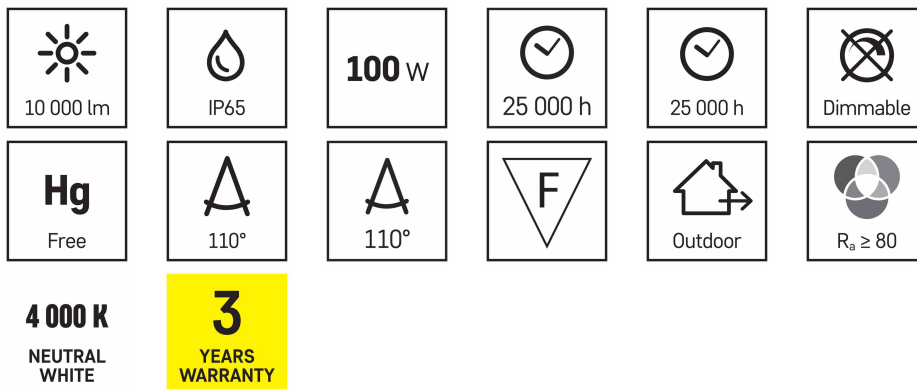

Technical Description

source of light
power
luminous flux
color temperature
light color
color rendering index (CRI)
warranty period
lifetime
category

LED
100 W
10 000 lm
4 000 K
neutral white
Ra > 80
3 years
25 000 hours
CLASSIC

Product sheet

line	TAMBO Evo
voltage	220–240 V~
frequency	50/60 Hz
working temperature range	-20 °C to +40 °C
IP rating	IP65
beam angle	110°
dimensions	275 × 219 × 41 mm
supply cable length	30 cm
colour	black
lead-in cable material	rubber
lead-in cable type	3G1.0 mm ²
current	430 mA
body material	aluminum
mechanical impact protection	IK07
material of the diffuser	plastic (PC)
packaging	1 pc, box
power source	mains powered
using	surface mounting
power factor	> 0.9
luminous efficacy	100 lm/W
flicker-free	yes
energy class of used light source	F

LED floodlight TAMBO EVO, 100 W, 10 000 lm, IP65, black